MIDAS WINDOW FILM™ CORONA WINDOW FILM™


BLACK PANTHER CERAMIC SERIES

HYBRID CERAMIC TECHNOLOGY | TECHNICAL PERFORMANCE OVERVIEW

VLT	IRR @ 1400 nm	IRER RANGE*	TSER RANGE*	UV REJECTION
03%	73%	35 - 55%	45 - 65%	99.5%
05%	73%	35 - 55%	43 - 63%	99.5%
15%	42%	20 - 40%	35 - 55%	99.5%
20%	42%	20 - 40%	32 - 52%	99.5%
43%	42%	20 - 40%	22 - 42%	99.5%

PERFORMANCE CURVES BY VLT

Cosine-smoothed curves across product shades

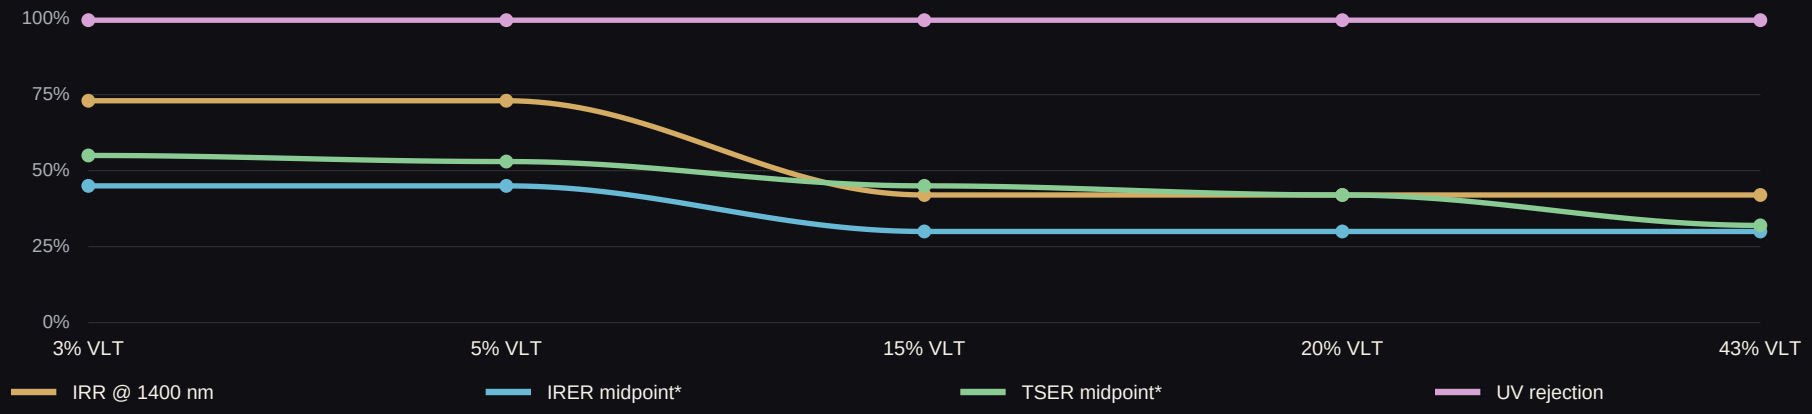

* IRER and TSER ranges are illustrative planning assumptions, not measured performance or manufacturer-certified specifications.

IRR values provided by Midas. UV rejection 99.5% supplied for this draft; all specifications subject to manufacturer validation.

Curves connect shade-specific values; they do not depict spectral response or laboratory measurements. Not for certified performance claims.