# BLACK DEFENDER


CARBON CERAMIC TECHNOLOGY | TECHNICAL COMPARISON

SERIES 03 / 10

| VLT | IRR @ 1400 nm | IRER MODEL | TSER MODEL | UV REJECTION |
|---|---|---|---|---|
| 15% | Up to 83% | 52% | 49% | **99.5%** |
| 35% | Up to 83% | 52% | 42% | **99.5%** |

Only 15% and 35% VLT are offered for Black Defender automotive dealers.

## MODELED PERFORMANCE BY VLT

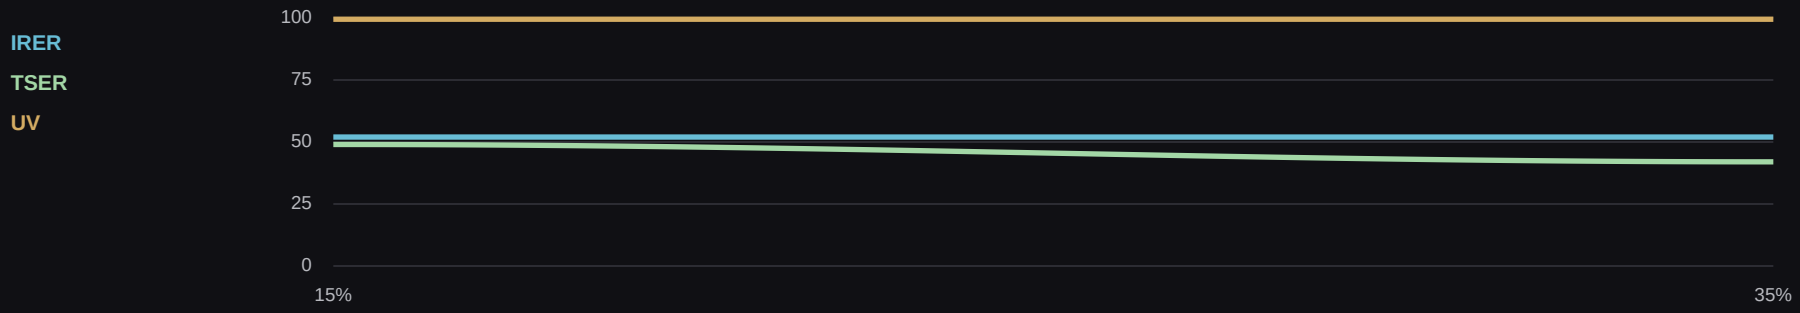


IRER and TSER are provisional engineering scenarios, not measured or certified performance.

IRR @ 1400 nm does not mathematically determine IRER or TSER; shade-specific values are shown when supplied.

UV rejection 99.5% per Midas specifications; confirm all technical values before external publication.



**Made in USA from Global Sourced Materials**