
BLACK UNIX PLUS

CARBON CERAMIC TECHNOLOGY | TECHNICAL COMPARISON

SERIES 02 / 10

VLT	IRR @ 1400 nm	IRER MODEL	TSER MODEL	UV REJECTION
3%	91%	44%	49%	**99.5%**
5%	72%	44%	48%	**99.5%**
15%	Not supplied	44%	45%	**99.5%**
20%	Not supplied	44%	43%	**99.5%**
35%	Not supplied	44%	39%	**99.5%**
50%	Not supplied	43%	34%	**99.5%**

MODELED PERFORMANCE BY VLT

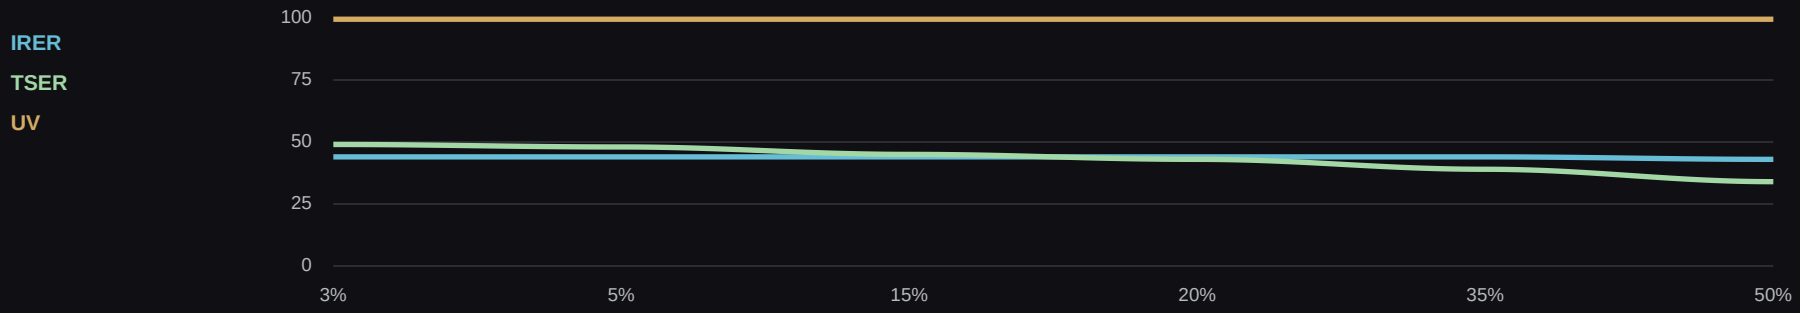

IRER and TSER are provisional engineering scenarios, not measured or certified performance.

IRR @ 1400 nm does not mathematically determine IRER or TSER; shade-specific values are shown when supplied.

UV rejection 99.5% per Midas specifications; confirm all technical values before external publication.

Made in USA from Global Sourced Materials