
BLACK WOLF

CARBON CERAMIC TECHNOLOGY | TECHNICAL COMPARISON

SERIES 08 / 10

VLT	IRR @ 1400 nm	IRER MODEL	TSER MODEL	UV REJECTION
5%	Up to 98.5%	62%	56%	**99.5%**
15%	Up to 98.5%	62%	53%	**99.5%**
20%	Up to 98.5%	62%	52%	**99.5%**
35%	Up to 98.5%	62%	47%	**99.5%**
50%	Up to 98.5%	61%	42%	**99.5%**
70%	Up to 98.5%	61%	36%	**99.5%**

MODELED PERFORMANCE BY VLT

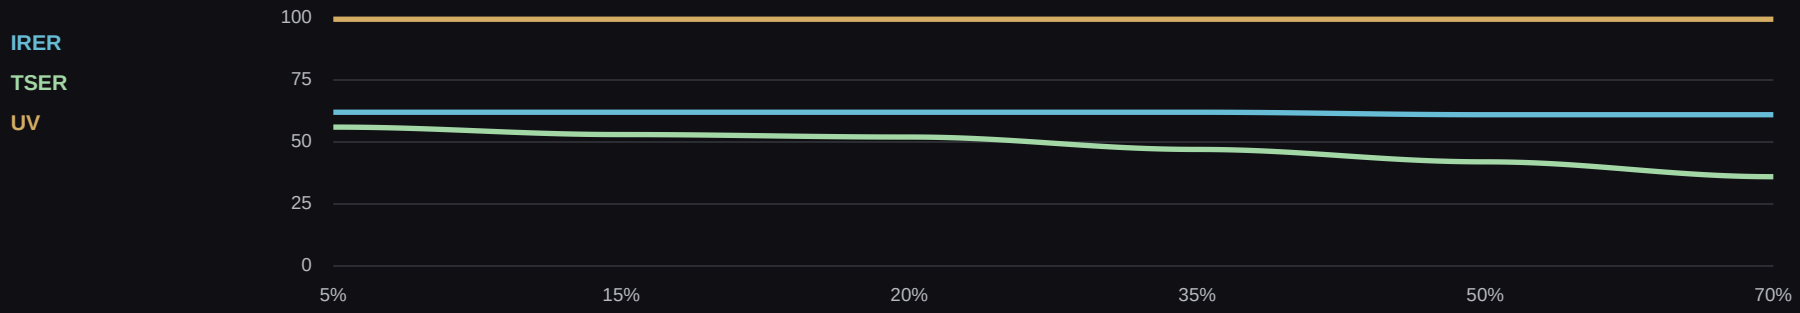

IRER and TSER are provisional engineering scenarios, not measured or certified performance.

IRR @ 1400 nm does not mathematically determine IRER or TSER; shade-specific values are shown when supplied.

UV rejection 99.5% per Midas specifications; confirm all technical values before external publication.

Made in USA from Global Sourced Materials